

HC3616FR Ceramic Hob

Installation, Use and Maintenance

www.cda.eu

Important

The CDA Group Ltd cannot be held responsible for injuries or losses caused by incorrect use or installation of this product. Please note that CDA reserve the right to invalidate the guarantee supplied with this product following incorrect installation or misuse of the appliance or use in a commercial environment.

This appliance is not designed to be used by people (including children) with reduced physical, sensorial or mental capacity, or who lack experience or knowledge about it, unless they have had supervision or instructions on how to use the appliance by someone who is responsible for their safety.

Under no circumstances should any external covers be removed for servicing or maintenance except by suitably qualified personnel.

Appliance information:

Please enter the details on the appliance rating plate below for reference, to assist CDA Customer Care in the event of a fault with your appliance and to register your appliance for guarantee purposes.

| Appliance Model | |
|-----------------|--|
| Serial Number | |

EU Declarations of Conformity

This appliance has been manufactured to the strictest standards and complies with all applicable legislation, including Electrical safety (LVD) 2014/35/EU and Electromagnetic interference compatibility

(EMC) 2014/30/EU. Parts intended to come into contact with food conform to 1935/2004/EC.

IMPORTANT INFORMATION FOR CORRECT DISPOSAL OF THE PRODUCT IN ACCORDANCE WITH EU DIRECTIVE 2012/19/EU.

At the end of its working life, the product must be taken to a special local authority waste collection centre or to a dealer providing appliance recycling services.

Disposing of a household appliance separately avoids possible negative consequences for the environment and health. It also enables the constituent materials to be recovered, saving both energy and resources. As a reminder of the need to dispose of household appliances separately, the product is marked with a crossed-out wheeled dustbin.

Please note:


- Ceramic hobs become hot and remain hot during and immediately after use. Do not touch the hob until it has been allowed to cool.
- Keep children away from the appliance when in use.
- Never use the hob top for storage.
- Pan handles should never stand out beyond the edge of the worktop. This will help to avoid children reaching them.
- Do not lean over the hob when it is in use.
- Follow the cleaning instructions carefully.
- Ensure the base of the saucepan is clean and dry before placing it on the hob.
- Avoid hard shocks from cookware the vitroceramic glass surface is highly resistant but not unbreakable.

- Do not place hot lids flat on the hob top. A "suction" effect could cause damage to the hob.
- Do not drag cookware across the hob top: in the long term, this could cause damage to the hob.
- Do not store cleaning or flammable products in the unit below the hob.
- Always use appropriate cookware.
- Do not cook unopened tins of food directly on the hob.
- Never put cooking foil or plastic materials on the ceramic surface when the hob is hot. These materials could melt and cause damage to the hob.
- This hob (Class 3) has been designed for use only as a cooking appliance. Any other use should be considered incorrect and therefore dangerous.

Important

- Do not use the hob if the glass surface is cracked or damaged to prevent the risk of electric shock. Disconnect it from the power supply.
- Ensure that the power cable of a connected electrical appliance near the hob is not in contact with the cooking zones.

Please note: When connecting the hob to the power and switching it on for the first time the cooking zone displays may show the letter "**H**". This is not a fault and the letter "**H**" should disappear after approximately one hour. Please see page 10 for more information.

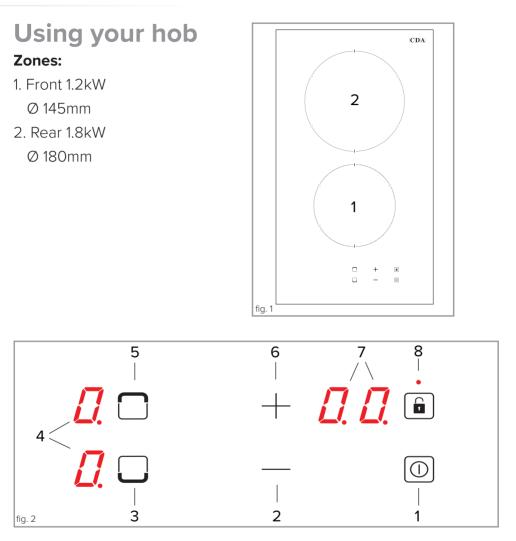

Control panel:

- 1. On/off sensor
- 2. Minus setting selector
- 3. Lower cooking zone selector
- 4. Cooking zone displays

- 5. Upper cooking zone selector
- 6. Plus setting selector
- 7. Operating time limiter display
- 8. Safety key lock selector and LED

Using Your Hob

To switch the hob on

To switch the power on, touch and hold the "On/off sensor" (1)
 for approximately one second. The hob will beep and all displays will show "0".

Please note: When switching the hob on after the appliance has been switched off at the mains, both cooking zone displays may show an "H". This is normal and they should disappear after approximately one hour. If the hob is used during this time however, then an "H" will appear to indicate that the relevant zone is still hot to the touch and will subsequently disappear after a certain amount of time.

To activate a zone and set a power level

 Simply switch the hob on, select the desired zone using the relevant cooking zone selector and use the plus or minus setting selectors to set the required power level. The power levels range from 1 (minimum) to 9 (maximum). The hob will then begin heating.

Please note: If a power level is not set within ten seconds of switching the hob on, the hob will switch off automatically.

To deactivate a zone

- Simply activate zone control by touching the relevant zone's selector and then touch the plus and minus setting selectors simultaneously. Alternatively, you can use the minus setting selector (2) to return the power level to 0. The cooking zone indicator will display a "0" to confirm that the zone is now inactive.
- $_{\rm 6}$ If switching off both zones, the above step needs to be taken

for each zone. When both the zones are at "0", the hob will switch off automatically after approximately ten seconds.

• To switch off the hob immediately, touch and hold the "On/off sensor" (1) for approximately one second.

Please note: Any zones that are still hot to the touch will display an "**H**" provided the mains power supply is not interrupted.

Operating time limiter

Each zone has an operating time limiter to prevent the hob from being left on indefinitely. After a zone is activated a 15 minute timer commences. Once 15 minutes have passed the associated zone is automatically switched off and residual heat indicator activated. Zones can still be used as normal in accordance with the operating instructions after this time and the operating time limiter will simply reset and start again. The limiter cannot be adjusted.

Keep warm function

Each zone also has a keep warm function which allows you to keep food at a low but warm temperature after cooking (food should only be kept warm for a short time to minimise the spread of bacteria) or for the gentle melting of butter or chocolate. To activate the function, simply activate zone control for the desired zone, press the zone's plus setting selector (6) to power level 1 and then press the zone's minus setting selector (2). A "*L*" will appear on the zone's display to confirm that the function has been activated.

To deactivate the function simply adjust the zone's temperature, if required, or switch the zone off.

Auto-heat Function

Both zones are equipped with an auto-heat function, which reduces the warming up time for the zone.

To activate the auto-heat function on a zone

 Switch the hob on, if not already so, activate zone control by touching the relevant zone's selector and then touch the minus setting selector. The zone display will show power level 9 along with a flashing decimal point. Then, and within 10 seconds, touch the minus setting selector and set the desired power level. The zone's display will alternate between the power level and the letter 'A' to confirm that the auto-heat function is active.

To deactivate the auto-heat function

 Simply touch the desired zone's selector, if zone adjustment is not already active, and then adjust the zone power level to '0'.

Each power level has a limited time for which the auto-heat function can be used. A table showing these times is shown below.

| Zone Power Level | 1 | 2 | З | 4 | 5 | 6 | 7 | 8 | 9 |
|--|---|-----|-----|-----|-----|---|-----|-----|---|
| Maximum Operating Time (minutes) | 1 | 2.4 | 4.4 | 5.2 | 6.2 | 1 | 2.4 | 2.4 | |

Please note: The auto-heat function is not compatible with power , level 9.

Safety Key Lock

To prevent accidental use, the hob has a safety key lock which switches controls off temporarily or completely. The safety key lock can be activated when the hob is turned on but not when power has been switched off or the appliance disconnected from the mains.

To activate the safety key lock

If the hob is on, then simply touch the safety key lock sensor (8) for approximately 2 seconds. The hob will beep and the safety key lock LED should illuminate. If either one or both zones are actively heating, press and hold the safety key lock sensor (8) for approximately 2 seconds. The hob will beep and the safety key lock LED should illuminate.

To deactivate the safety key lock

Simply touch and hold the safety key lock sensor (8) for approximately 2 seconds. The hob will beep and the safety key lock LED should extinguish.

Residual Heat Indicators

The hob is equipped with residual heat indicators to warn when any of the zones are still hot to the touch after use. An "**H**" will show on the relevant zone's indicator for some time after cooking.


The duration for which the residual heat indicators are displayed for is determined by the power level last used and the subsequent estimated cooling time. As a result of this, the residual heat indicator may sometimes be shown even when the zone is no longer hot to the touch.

Please note: In the event of a power cut or failure, the residual heat indicators will illuminate after the power supply is restored. In the event of the restoration of the power supply, or when the hob is first installed and switched on, the residual heat indicators can show for up to one hour. This does not affect the hob's operation and is not indicative of a fault. When there is no power supply to the hob however the residual heat indicators will not work, yet the hob zone(s) may still be hot, so extra care must be taken.

Please remember: You should avoid touching any zone whilst the hob is in use or whilst either residual heat indicator is displayed. Only pans with contents should be on the zones during use and you should not leave any objects on the zones after use.

Efficient Use of Your Hob

The hob is equipped with zones designed to accommodate most shapes and sizes of pan. For best results, only use pans with flat bottoms. The most efficient use of the hob is shown below, where the pan and zone are correctly chosen. Use pan lids where possible to minimize the energy usage of your appliance.

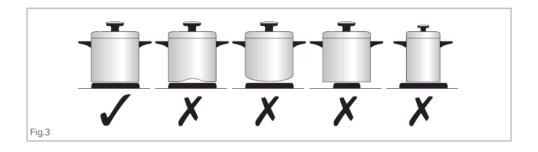

| Zone Size | Minimum Pan Size (mm) | Maximum Pan Size (mm) |
|-----------|-----------------------|-----------------------|
| Ø 145mm | 120 | 160 |
| Ø 180mm | 160 | 200 |

Locating a pan in the centre of the zone markings will ensure optimum efficiency.

It is very important that the pans used on the hob are made of a suitable material and have the correct type of base. The base of the pan and the hob top must be clean before use to prevent any scratches on the hob top.

Please note: Extra care should be taken if cast iron pans are used as these have coarse bases which may damage the hob top.

Care and Maintenance

Always disconnect the appliance from the power supply before undertaking any cleaning or maintenance.

Important:

- Steam cleaners must not be used when cleaning this appliance.
- You should use a non-abrasive cleaner to clean the hob top. Any abrasive cleaner (including Cif) will scratch the surface and could erase the control panel markings.
- Sugar and starch can cause permanent damage to the surface of the hob. Wipe away any spillages immediately but be careful given that the hob top will be hot during and after usage.
- Avoid letting pans boil over where possible to ensure that the need for cleaning is minimal.
- Always use a soft sponge or cloth where possible. Utensils such as scouring sponges and some brushes could cause scratches to the hob top.

A cleaning guide is available on page 13.

| Type of residue | Clean with | Cleaning advice |
|---|---|--|
| Light | Cleaning sponge and soft cloth | Wipe over the zone to be cleaned with a sponge and hot water, and then wipe off with a soft dry cloth. |
| Accumulated baked- on stains/dirt, sugar spills or melted plastics | Cleaning sponge or glass scraper and soft cloth | Wipe over the zone to be cleaned with a sponge and hot water, using a ceramic scraper to remove any large marks or stains and then wipe off with a soft dry cloth. |
| Rings and hard water residues | White vinegar and soft cloth | Pour a small amount of warm white vinegar onto the stain, leave it to stand, and then wipe off with a soft dry cloth. |
| Shiny metallic streaks | Cleaning agent for vitroceramic glass | Use specialist vitroceramic glass cleaner (preferably one with silicone for its protective properties) |

If your hob is not working:

- 1. Check that the zone is switched on.
- 2. Check that the mains supply has not been switched off.
- 3. Check that the fuse in the spur has not blown.

In the event of a fault with the hob please advise CDA Customer Care.

Contact CDA Customer Care

- A: Customer Care Department, The CDA Group Ltd, Harby Road, Langar, Nottinghamshire, NG13 9HY
- T: 01949 862 012 F: 01949 862 003
- E: customer.care@cda.eu W: www.cda.eu

Troubleshooting

| Problem | Possible Causes | Possible Remedy | | |
|--|--|--|--|--|
| The appliance does not work and no indicators are lit. | The appliance has no power | Check the fuse and replace if blown. | | |
| Sensor fields do not respond when touched. | Appliance is not turned on | Turn on the appliance | | |
| | A sensor field has been touched too briefly (less than a second) | Touch the sensor field again and for longer | | |
| | Multiple sensors have been touched/covered at the same time | Only touch one sensor field at a time unless instructed otherwise | | |
| | The safety key lock is engaged | Disengage the safety key lock as per page 9 | | |
| The appliance does not respond and emits an extended beep | Improper use (wrong sensor fields touched or touched too briefly) | Switch the appliance off via the on/off sensor and at the mains and then switch the power and appliance on again | | |
| The appliance switches itself off | No heat level has been set within 10 seconds of activating the appliance | Switch on the appliance and set zone and heat setting without delay | | |
| | Sensor fields covered or dirty | Uncover or clean the sensor fields | | |
| A cooking zone switches itself off and a residual heat indicator is shown. | Operating time limiter has activated. | Nothing (see page 7) | | |
| | Sensor fields covered or dirty | Uncover or clean the sensor fields | | |
| | Electronic components have overheated | Nothing. Allow appliance to cool. | | |

| Problem | Possible Causes | Possible Remedy | | | |
|---|---|--------------------------------------|--|--|--|
| Residual heat indicator has extinguished despite zone(s) still being hot. | The appliance has no power or the residual heat timer has expired (page 10). | Check the fuse and replace if blown. | | | |
| Hob top is broken, cracked and/or chipped. | Stop using the appliance immediately and switch the appliance off at the mains. Contact CDA Customer Care to arrange a repair (contact details on page 13). | | | | |
| A fault has not been resolved by any suggested remedies or a fault code is displayed | Contact CDA Customer Care using the contact detail on page 13 to arrange a service visit. | | | | |

Should any error code show on the zone displays, or the above steps not resolve an issue, please contact CDA Customer Care for assistance. Contact details are on page 13.

IMPORTANT - PLEASE NOTE: In the event of any breakage, crack or cracking – even minimal – of the vitroceramic glass, immediately disconnect your appliance to prevent a risk of electric shock and contact CDA Customer Care.

Fitting the Hob

Unpacking the hob:


Take care not to lose, drop or mishandle any parts.


Fitting position of the hob:

This appliance must be installed a minimum of 50mm from any back wall and a minimum of 55mm away from any adjacent vertical surfaces, e.g. a tall cupboard end panel. These dimensions are shown in Fig.8 on page 18.

Ventilation requirements:


This appliance must be installed to allow air to flow freely to the air intake and from the air outlet. An air gap of 20mm is recommended immediately below the hob. Failure to allow sufficient ventilation could cause problems with operation or damage to the hob and constitutes incorrect installation, which is not covered by the product's warranty (Figs. 4 and 5).





If fitting a cooker hood above the hob:

If a cooker hood is to be installed above the hob, the height of the hood above the hob must be at least 600mm (650mm is recommended) (Fig.6). If the instructions supplied with the hood dictate that the hood must be installed at a height greater than 600mm, then that height is the minimum required.



Wall furniture requirements:

The minimum height of any cabinet immediately above the hob is 900mm. The minimum height of any adjacent units (including light pelmets) is 400mm, unless they are manufactured from a material resistant to fire (steel, for example).

Important notes:

- Do not position this appliance above a refrigeration unit. The heat generated may cause the refrigeration unit to fail.
- This appliance is designed to be installed into cabinet units capable of withstanding temperatures of 65°C or greater above ambient temperature.
- Never place perishable foods, cleaning products or flammable items in the cupboard below the appliance.
- If the hob is to be located above a working drawer, we recommend that the drawer is not used for storing soft items, for example dusters or towels; this is to minimise the risk of the cooling system air intakes being obstructed.

How to Install the Hob


Overall dimensions of the hob: Width: 300 mm Depth: 520 mm Worktop cut-out dimensions: Width: 285 mm Depth: 490 mm

1. Make the required hole in the worktop. Before doing this, you must check the 1 - Worktop 2 - Hob seal 3 - Ceramic hob

instructions supplied with any cooker hood to ensure that you will have the required clearance. The cut-out (Fig.8) shows a 60mm gap from the worktop edge to the cut-out edge. The distance from the hob, when fitted, to the back wall should be 50mm.

If a splashback/worktop upstand is to be fitted, take this into account when cutting the hole. The minimum distance that the hob should be positioned away from the rear wall or splashback is 50mm.


 Make sure that the worktop is clean and dust free and insert the hob into the cut-out opening. Press the hob firmly into place so that the seal connects with the worktop (Fig. 7).

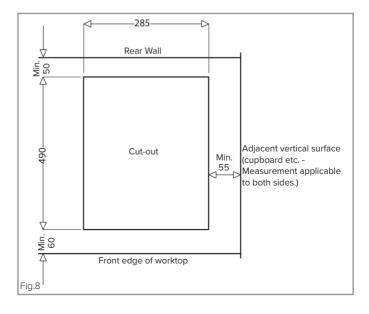

If fitting the hob into a 28-40mm worktop:

The four fixing clips supplied should be used. If fitting the hob into a thin worktop (i.e. 28mm), then we recommend using four 15x15x50mm wooden batons in addition to the brackets (as per figs. 9 and 10).

Position the fixing brackets perpendicularly to the hob's edge and tighten firmly.

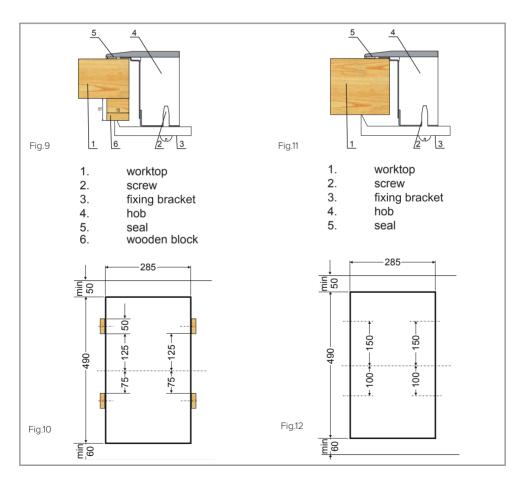


Mains Electricity Connection

Warning! This appliance must be earthed.

We recommend that the appliance is connected by a qualified electrician, who is a member of the N.I.C.E.I.C. and who will comply with the I.E.T. and local regulations.

This appliance is intended to be connected to fixed wiring but is also suitable for connection to a 13A plug. Any plug fitted to this appliance must be BS 1363A type. Any plug fuse used must be ASTA approved to BS 1362 type.




If installing this appliance to fixed wiring then it must be connected by a double pole switch, having a contact separation of at least 3mm in all poles. The switch must be positioned no further than 2m from the appliance.

Please note:

 The mains cable must only be replaced by a qualified electrician or service engineer and must be of equivalent or better rating (i.e. 1.5mm², HO5VV-F).

- This appliance is intended to be connected to the mains supply with a cable of cross sectional area 1.5mm².
- The current rating of the fuse or circuit breaker protecting this appliance should be marked on the socket outlet.
- Assembly and electrical connection should be carried out by specialised personnel.
- When installing this product we recommend you seek the help of another individual.
- Should the mains cable be damaged or need to be replaced, it should only be done so by a qualified electrician or engineer. The connections to the hob are shown below;



• Ensure that the leads are securely fitted. Failure to do so may prevent the hob from operating correctly.

Appliance electrical rating: 3000W

| Energy Efficiency Information | | | | |
|---|---------------------|--------------------------|-------|--|
| Attribute | Symbol | Value | Units | |
| CDA model | | HC3616FR | | |
| Type of hob | | Built in | | |
| Number of cooking zones and/or areas | | 2 | | |
| Heating technology (induction cooking zones and cooking areas, radiant cooking areas) | | Radiant cooking zones | | |
| For circular cooking zones or area: diameter of useful surface area per electric heated cooking zone, rounded to the nearest 5mm | Ø | F:14.5 / R:18.0 | cm | |
| For non-circular cooking zones or areas: length and width of useful surface area per electric heated cooking zone or area, rounded to the nearest 5mm | L W | NA | cm | |
| Energy consumption per cooking zone or area calculated per kg | EC Electric cooking | F:193.9 / R:193.9 | Wh/kg | |
| Energy consumption for the hob calculated per kg | EC Electric hob | 193.9 | Wh/kg | |

NOTES:



Please contact our Customer Care Department for Service on the details below

Customer Care Department

The ICIDIAI Group Ltd. • Harby Road • Langar • Nottinghamshire • NG13 9HY T : 01949 862 012 F : 01949 862 003 E : customer.care@cda.eu



Copyright © CDA 2016

www.cda.eu