



Cleaning & Maintenance Instruction

Product Description: Taps

Cleaning Instruction

Clean regularly with mild soapy water using a cloth or sponge. Do not use abrasive, Chlorine or any other acid-based cleaning products

Maintenance Procedures

Dripping taps will waste water and may cause stains – it is a simple matter to renew the washers.

Faulty equipment should be repaired or replaced immediately.

ACT2092 - Single Lever

Product Finish: Chrome

EAN13 barcode: 5060344153447



Product features:


- Metal construction throughout
- Single lever control for effortless single handed control
- Minimalist planate design form
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting

Additional information / Parts included:

n/a

Primary WRAS fittings number (see www.wras.co.uk):
1405307

Product dimensions:

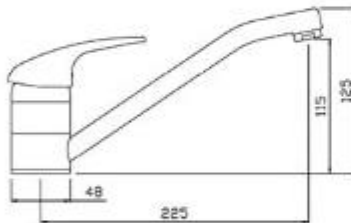

- Overall Height / projection: 125.0 mm
- Exit reach: 225.0 mm
- Exit height: 115.0 mm
- Centre distance(s): n/a
- Base diameter(s): 48.0 mm
- Recommended hole diameter: Ø35 mm
- Max. surface depth: 70.0 mm
- Spout diameter: n/a mm
- Spout aerator size: M24 x M

Packaged properties:

Box length: 310.0 mm Box depth: 70.0 mm
Box width: 130.0 mm Units per outer: 10.0
Tap only weight: 0.62 kg Boxed weight: 1.00 kg

Product flow characteristics:

Flow graph not available

- Min / Max water pressure: 0.30 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 19.83
- Control valve type: 40mm Ø single lever ceramic cartridge
- Flow characteristics: Single flow
- Non return valve(s): None

- Aerator type: Honeycomb aerator
- Spout connection method: Base plinth removes
- Tail pipe inlet / outlet size: M12 / 1/2" BSP Male (with x 2 Nut & Olive)
- Inlet pipe type / length: flexible stainless braided hose / 310.0 mm

Care instructions summary:

- Clean the basins and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue.
- Residue of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives.

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year